

STAGEMAKER® SR1 at a glance ! Small but **powerful** 250 kg on one fall !




Technical characteristics

- > 1 fall (250 kg) or 2 falls hoist (500 kg).
- > Lifting speed : 4 m/min.
- > Center to center hoist.
- > Clutch on the safe side.
- > Same iconic design that actual SR range (oval shape).
- > Hoist body : 100% aluminum body, no plastic parts.
- > Double brake as standard
- > Rotating upper and lower hooks.
- > DIN hooks.
- > Rubber ergonomic grip on top hook.
- > IP55 Protection.
- > 4x11 chain (same chain as SR2).
- > Available in Version A (direct control),
Version B (Low voltage control) and version S
(Single phase - available later).
- > Black CE P17 plug for better integration.
- > Black lifting chain.
- > Free maintenance brake.
- > RAL7021 epoxy paint.
- > Climbing hoist or industrial suspension configuration can
be changed simply by reversing the chain container.
- > **PERFECT PUSH**. New patented concept,
5 pocket load wheel, fitted with 5 intermediate teeth. This
innovation provides improved chain guiding and chain
flow, to help reduce the risk of chain jamming.
- > **CHAINFLUX** as standard. Horizontal ejection
of the chain.
- > **LIMITFLUX**. Magnetic limit switch on
B version.

Options

- > Version A, B or C.
- > Handles.

Stagemaker SR1	1 fall	2 falls
SWL (kg)	250	500
Dimensions	Best dimensions on the market with 1 or 2 brakes	Best dimensions on the market with 1 or 2 brakes
Weight (kg)	10,5	10,5
Sound level	50 db	50 db
Integration into 12" truss	Yes	Yes
Double brake as standard	Yes, with 1 or 2 brakes	Yes, with 1 or 2 brakes
Chainflux as standard	Yes	Yes
PerfectPush as standard	Yes	Yes
Limiflux as standard	Yes (on low voltage type B version)	Yes (on low voltage type B version)
Versatile use of the hoist (Climbing hoist or industrial suspension)	Yes (just by reversing the hoist)	Yes (just by reversing the hoist)

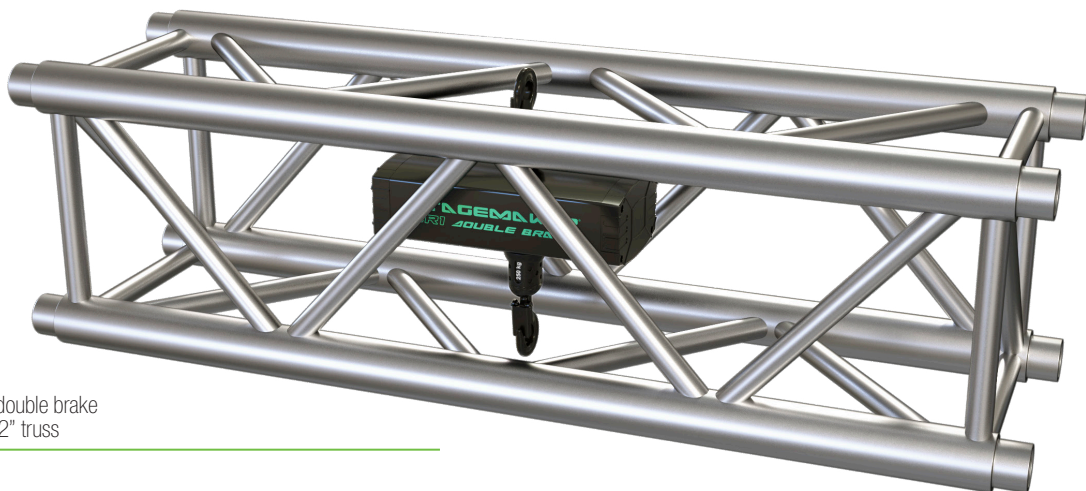

Stagemaker SR1 double brake
fits perfectly in a 12" truss