



ToneKolor 4406HD



# ToneKolor 4406HD

ToneKolor 4406HD is a wash projector equipped with 44 x 6W RGBW LEDs, particularly adapted for architectural lighting or any outdoor event, thanks to its IP65 rating, its flow of 1 200 lux at 5m and its 35° lenses, with a power consumption of only 260W. It is also very effective for stage and decorative lighting.

LED RGBW  
Illuminance 1 200 lux at 5m  
16-bit gradation dimmer  
Refresh rate 7000 Hz  
Fan cooling  
Optional Barndoors

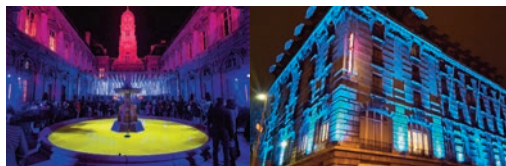

# Projectors



	CITYKOLOR 5410HD	TONEKOLOR 4406HD	PARKOLOR 120HD	LIVEKOLOR HD	ZOOMKOLOR HD
<b>SOURCE</b>					
Source Type	54 x LED RGBW CREE 10W	44 x LED RGBW 6W	LED COB 120W RGBW	3 LEDs COB RGBW 60W	LED Multichip RGBW 60W
Illuminance	568 lux @ 5m	1 200 lux @ 5m	3 400 lux @ 5m zoom mini	9 500 lux @ 5m (4,5°)	3 000 lux @ 5m (4,5°)
<b>OPTICS</b>					
Opening Angle	45° (beam: 38°; field: 78°)	35° (beam: 28°; field: 53°)	beam: 7 - 40°; field: 19 - 50°	4,5 - 45°	4,5 - 45°
<b>EFFECTS</b>					
Dimmer	Linear 0-100%	16-bit	No	No	No
Strobe	33 Hz	30 Hz	No	25 Hz	25 Hz
<b>CONTROL</b>					
DMX channels	6/11	1/3/4/5/10/14/15	3/4/7/9	9/12/17	9/12/17
DMX Mode	DMX512	DMX512	DMX512	DMX512	DMX512
DMX Connection	XLR 3 -pin	XLR 5-pin	XLR 5-pin	XLR 3 -pin, 5-pin	XLR 5-pin
DMX Wireless	Wireless Solution	No	No	No	No
<b>HOUSING</b>					
IP	IP65	IP65	IP65	IP65	IP65
<b>DIMENSIONS / WEIGHT</b>					
Dimensions (L x l x H) :	726 x 666 x 281 mm	490 x 285 x 105 mm	350 x 240 x 400 mm	312 x 405 x 250 mm	345 x 242 x 245 mm
Weight	29 kg	9 kg	7,2 kg	9,1 kg	4,5 kg
<b>POWER</b>					
Consumption	700 W	260 W	111 W	180 W	85 W